

GOGINA, Ye.Ye.

Biomorphology of *Festuca varia* Haenke. Bot.zhur. 46 no.6:824-841
Je '61. (MIRA 14:6)

1. Botanicheskiy institut imeni V.L.Komarova AN SSSR, Leningrad.
(Fescue)

SEMENOVA-TYAN-SHANSKAYA, A.M.; YAKOVLEV, N.S.; GODINA, N. I.

In memory of Elizaveta Aleksandrovna Bush (Feb. 14, 1886 - Sep. 12, 1960).
Bot. zhur. 48 no. 2:297-302 F '63. (MIA 16:4)

1. Botanicheskiy institut imeni V.L.Komarova AN SSSR, Leningrad.
(Bush, Elizaveta Aleksandrovna, 1886-1960)

GOGINA, Z.M.; KALASHNIKOV, B.P., direktor.

Suturing the cornea and sclera in open wounds of the eye ball as method of primary treatment of such wounds. Vest.oft. 32 no.2:27-31 Mr-Apr '53.
(MLRA 6:5)

1. Glaznoye otdeleniye Novgorodskoy oblastnoy bol'nitsy (for Gogina).
2. Leningradskiy institut glaznykh bolezney imeni Girshmana (for Kalashnikov).
(Eye--Wounds and injuries) (Sutures)

AUTHOR: Goginava, D.M., Engineer, Dementev, B.B., Engineer, Kantor,^{b26}
D.M., Engineer, Sbitnev, G.F., Engineer, and Edelman, I.M.,
Engineer (Moscow Electro-mechanical works).

TITLE: A device for automatic checking of three-phase integrating
meters. (Ustroystvo avtomaticheskoy proverki trekhfaznykh
elektroschetchikov.)

PERIODICAL: "Vestnik Elektropromyshlennosti" (Journal of the Electrical
Industry), 1957, Vol. 28, No. 5, pp. 55 - 57 (U.S.S.R.)

ABSTRACT: The Moscow Electro-mechanical Works manufacture more than
300 types of integrating meters but although they are all made
in large numbers they were until recently all tested by visual
inspection using a standard wattmeter and a stopwatch. The
factory, therefore, manufactured a photo-electric test bench
which was put into operation in 1956. An integrating meter
of specially good accuracy is used as a standard. There are
24 slots on the meter disc and a ray of light from an incan-
descent lamp passes through a slot in the disc and falls on a
photo cell. The current from the photo cell is amplified and
passed through an impulse counting relay. For each revo-
lution of the disc the relay counts 24 impulses. The speed
of the meters under test is determined in the following way.
Twelve chamfers are pressed on the disc and a light is arranged
to be reflected from the chamfers on to a photo cell and
thence to an amplifier and an impulse counter. For each
rotation of the disc the counter records twelve impulses.

A device for automatic checking of three-phase integrating meters. (Cont.)

426

Thirty meters can be tested simultaneously. After the required load conditions have been set up, the standard meter's relay is set for a given number of impulses, the pointers of all impulse counters are set to zero and the test is started. After the requisite number of impulses has passed the counter on the standard instrument the test is discontinued and readings can be taken on the meters under test.

The elements of the test bench are described. The bench has proved very successful in operation the errors are much less than they were before and consequently the number of meters rejected is reduced. The State Inspecting Authority has inspected the test bench and has authorised its use for meter testing.

5 figures, no literature references.

NALIVKIN, D.V., akademik, glav. red.; BELYAYEVSKIY, N.A., zam. glav. red.;
TIKHOMIROV, V.V., zam. glav. red.; ASSOVSKIY, A.N., red.; MEL'NIKOV,
O.D., red.; SHATSKIY, N.S., akademik, red. [deceased]; YANSHIN, A.I.,
akad., red.; AKOPYAN, A.O., red.; ASLANYAN, A.T., red.; GOGINYAN,
V. Ie., red.; GULYAN, E.Kh., red.; KAZARYAN, S.V., red.; MALKHASIAN,
E.G., red.; KHACHATURYAN, E.A., red.; GOVORKYAN, L.M., red. vypuska;
VARTANESOVA, A.A., red. izd-va; SAROYAN, P.A., tekhn. red.

[Study of the geology of the U.S.S.R.] Geologicheskaja izuchenost'
SSSR. Erevan, Izd-vo Akad. nauk Armianskoi SSR. Vol. 48. [Armenian
S.S.R.; period of 1951-1955] Armianskaia SSR; period 1951-1955.
No. 1. [Published studies] Opublikovannye raboty. 1961. 127 p.

(MIRA 14:9)

(Armenia--Geology)

AIRAKELYAN, R.A.; VEGUNI, A.T.; BAL'YAN, S.P.; SAYADYAN, Yu.V.;
ASRATYAN, V.P.; BAGDASARYAN, G.P.; MALKHASYAN, E.G.;
ARUTYUNYAN, A.R.; ARUTCHYAN, A.G., red.; ASLANYAN, A.I., red.;
GOGINYAN, V.Y., red.; GULYAN, E.Kh., red.; KAZARYAN, S.V., red.;
MKRTCHYAN, K.A., red.; TSAMERYAN, P.P., red.

[Study of the geology of the U.S.S.R.] Geologicheskaja izu-
chennost' SSSR. Erevan, Izd-vo AN Arm. SSR Vol.48. No.1.
1964. 157 p. (MJRA 13:6)

GOGOIU, M.

"In ten years."

p. 1 (Drumul Belsugului) No. 12, Dec. 1957
Bucharest, Rumania

SO: Monthly Index of East European Accessions (EEAI) LC. Vol. 7, no. 4,
April 1958

GOGISH, L.V.; STEPANOV, G. Yu. (Moscow)

"An approximate analysis of two-dimensional supersonic flows with characteristics of small curvature".

report presented at the 2nd All-Union Congress on Theoretical and Applied Mechanics, Moscow, 29 Jan - 5 Feb 64.

L 4 692-⁹ EKT(1)/PM(m) WW

ACC NR: AF6020731

SOURCE CODE: UR/0421/66/000/c03/0109/0114

AUTHOR: Gogish, L. V. (Moscow); Stepanov, G. Yu. (Moscow)

ORG: none

TITLE: Contribution to the calculation of the bottom pressure in two-dimensional supersonic flows /

SOURCE: AN SSSR. Izvestiya. Mekhanika zhidkosti i gaza, no. 3, 1966, 109-114

TOPIC TAGS: supersonic flow, pressure effect, detached shock wave, supersonic nozzle, Prandtl boundary layer

ABSTRACT: Since the published papers on the subject emphasize the behavior of the dissipative layer at the boundary of the detachment zone and pay little attention to the outer inviscid layer, the authors have developed a general approximate method of determining the bottom pressure in complex two-dimensional isentropic hypersonic flow. The approximation consists of using linear characteristic and a specified detached-flow hodograph. The influence of the dissipative layer is taken into account by means of a universal function - the permissible angle of rotation of the layer in the stream compression region. The results of the calculations are shown to be in satisfactory agreement with experimental data on the bottom pressure at the butt end of a cylinder, at the end surfaces in a flat channel following sudden expansion, and in a plane Prandtl-Meyer nozzle with a corner. The dependence of the bottom pressure on the features of the detached flow and its boundaries is determined on the basis of the

Card 1/2

1 45632-16

ACC NR: AP6020731

derived formula. The nozzle calculations were made in collaboration with T. S.
Soboleva. Orig. art. has: 5 figures and 7 formulas.

SUB CODE: 20/ SUBM DATE: 25Nov65/ ORIG REF: 002/ OTH REF: 005

Card 2/2 bs

L 24791-66 EWT(1)/EWP(m)/ETC(m)-6/EWA(1) WW/RM

ACC NR: AP6013225

SOURCE CODE: UR/0421/66/000/D02/0175/0180

AUTHOR: Gogish, L. V. (Moscow)

ORG: none

TITLE: Investigation of short supersonic nozzles

SOURCE: AN SSSR. Izvestiya. Mekhanika zhidkosti i gaza, no. 2, 1966, 175-180

TOPIC TAGS: nozzle, supersonic nozzle, nozzle design, supersonic gas flow, nozzle flow, contoured nozzle

ABSTRACT: The problem of designing maximum thrust nozzle contours for a given length and exit radius has been the subject of numerous investigations. It was shown by J. H. Ahlberg et al. (Truncated Perfect Nozzles in Optimum Nozzle Design. ARS Journal, 1961, Vol. 31, No. 5), for example, that an optimum nozzle contour can be selected graphically from a family of truncated perfect nozzles. However, this article demonstrates experimentally that in nozzle optimization it is more expedient to use nozzles with weak shocks and some overexpansion, obtained by increasing the nozzle contour curvature as compared to that of a truncated perfect nozzle. Tests were conducted with a series of two-dimensional nozzles with a constant contour profile but with various degrees of flow expansion. Measurements were made of the static pressure distribution along the wall of the nozzle supersonic section and of the total pressure at the nozzle exit. The experimentally determined thrust of the

Card 1/2

I-24791-65

ACC NR: AP6013225

nozzle supersonic section with an increased contour curvature was compared with the calculated thrust of the supersonic section of truncated perfect nozzles with uniform characteristics. The obtained results indicate that there is a definite range of nozzle dimensions at which the nozzles with increased contour curvatures are more advantageous than the truncated perfect nozzles. In this case, the contour inclination angle in a nozzle with a shock at the exit cross-section is not equal to zero and the shock effect is small. The author thanks G. Yu. Stepanov for stating the problem and his guidance. Orig. art. has: 7 figures and 6 formulas. [AS]

SUB CODE: 21/ SUBM DATE: 27Aug65/ ORIG REF: 002/ OTH REF: 003

Card 2/2 *B2*

GOGISH, V.

Avtolininia Moskva-Tula. Automobile line Mongow-Tula. K. proektirovaniu i
organizatsii. (Avtomobil', 1941, no. 6, p. 5-7). DLC: TL4.A87

SO: Soviet Transportation and Communications, A Bibliography, Library of Congress,
Reference Department, Washington, 1952, Unclassified.

GOGISH, V.

Automobile drivers in the October Revolution. Za rul. 17 no.11:
2-3 N '59. (MIRA 13:4)
(Russia--Revolution, 1917-1921)

9.6000:1012,1056,1067

83535
S/112/59/000/015/043/068
A052/A002

Translation from: Referativnyy zhurnal, Elektrotehnika, 1959, No. 15, p. 169,
321⁴⁷

AUTHOR: Gogish-Klushin, Yu.V.

TITLE: An Automatic Electronic Device for Recording Polarization Curves X

PERIODICAL: Sb. tr. Vses. n.-i. in-t Goznaka, 1957, No. 1, pp. 177-190

TEXT: An automatic electronic device for recording polarization curves has been developed. An "ЭППВ-51" (EPPV-51) electronic potentiometer with additional resistances and a high-ohm voltage divider are used. For graduation of reference points a " Π -4" (P-4) potentiometer is applied. The current consumption of the electronic potentiometer is about 10^{-9} - 10^{-10} amperes. Such currents do not cause a polarization of electrodes and the polarization curves are stable and reproducible. The current of the electrode cell changes synchronously with the work of the potentiometer; a rheostat driven by a " Δ -10⁴" (D-104) reversible motor is used for this purpose. The device is fed from a

Card 1/2

83535
S/112/59/000/015/043/068
A052/A002

An Automatic Electronic Device for Recording Polarization Curves

"СЭИ-220-0,5" (SEI-220-0.5) ferroresonance stabilizer. The device was operated for 2 years under industrial conditions without failures.

A.A.S. 

Translator's note: This is the full translation of the original Russian abstract.

Card 2/2

83536

9,6000:1012,1056,1067

S/112/59/000/D15/044/C68
A052/A002

Translation from: Referativnyy zhurnal, Elektrotehnika, 1959, No. 15, p. 169,
32148

AUTHOR: Gogish-Klushin, Yu.V.

TITLE: A Study of Some Electrode Processes on the Automatic Electronic
Device for Recording Polarization Curves

PERIODICAL: Sb.: Tr. Vses. n.-i. in-t Goznaka, 1957, No. 1, pp. 191-196

TEXT: It is found out that a polarization curve with a correction for an increasing cathode surface can be obtained by recording a series of polarization curves on the automatic electronic outfit with a subsequent superimposing and graphic interpolation. A simultaneous recording of time-cathode potential curves enables to judge the cathode surface increase when the layer of built-up metal becomes thicker. The curves indicate the formation of passive films on the newly settled metal layer and the settling of powdered porous deposits.

A.A.S.

Translator's note: This is the full translation of the original Russian
Card 1/1

XX

GOGISH-KLUSHIN, Yu. V. Cand Tech Sci -- (diss) "Study of the effect of the composition of electrolytes upon the cathode process and the physicomechanical properties of electrolytes used for galvanoplastic plating." Mos, 1959. 15 pp (Min of Higher Education. Krasnoyarsk Inst of Nonferrous Metals im M. I. Kalinin), 150 copies (KL, 41-59, 104)

KASHAKASHVILI, N.V.; GLADKOSKOK, P.P.; KHOSHTARIYA, Sh.P.; MINDELI, M.Sh.
Prinimali uchastiye: PARASTASHVILI, V.V.; KOHERIDZE, V.G.;
CHKHEIDZE, Z.A.; RUKHADZE, E.A.; KENKEBASHVILI, O.A.; SHARASHIDZE,
S. Sh.; GOGISHVILI, A.G.; MELKADZE, N.V.; DZAMASHVILI, A.V.;
GORDEZIANI, N.N.; ABRAMISHVILI, R.N.

Performance of Transcausasia Metallurgical Plant blast fur-
naces operating on natural gas. Trudy GPI [Gruz.] no.4811-23
'62
(MIR 17:8)

GOG-SHVET I. Sh.

NORAKIDE, G.K.

1

SG

1971/2/23

Electrolyte and Conductivity Res. Institute, Institute of Chemistry, No. 1, Chernogolovka, Moscow Region, USSR, 1971. Sub p. 2,000 pages printed.
Abstract: Electrolyte and Conductivity Research Institute, Chernogolovka, Moscow Region, USSR.

Electrolyte and Conductivity Research Institute, Chernogolovka, Moscow Region, USSR.

Electrolyte and Conductivity Research Institute, Chernogolovka, Moscow Region, USSR.

Electrolyte and Conductivity Res. Institute, Chernogolovka, Moscow Region, USSR. This book is intended for specialists working in the field of electrolytes and related fields.
This book contains a collection of articles presented most recently in the field of electrolytes and conductivity. The aim and objectives of research work in this field are to develop methods for the production of high-purity materials and compounds for the preparation of homogeneous and homogeneous mixtures and emulsions. Special attention is given to the development of new methods for the preparation of homogeneous and homogeneous mixtures and emulsions.

1971/2/23

Electrolyte and Conductivity Res. Institute, Chernogolovka, Moscow Region, USSR. This book contains a collection of articles presented most recently in the field of electrolytes and conductivity. The aim and objectives of research work in this field are to develop methods for the production of high-purity materials and compounds for the preparation of homogeneous and homogeneous mixtures and emulsions. Special attention is given to the development of new methods for the preparation of homogeneous and homogeneous mixtures and emulsions.

1971/2/23

Electrolyte and Conductivity Res. Institute, Chernogolovka, Moscow Region, USSR. This book contains a collection of articles presented most recently in the field of electrolytes and conductivity. The aim and objectives of research work in this field are to develop methods for the production of high-purity materials and compounds for the preparation of homogeneous and homogeneous mixtures and emulsions. Special attention is given to the development of new methods for the preparation of homogeneous and homogeneous mixtures and emulsions.

1971/2/23

Electrolyte and Conductivity Res. Institute, Chernogolovka, Moscow Region, USSR. This book contains a collection of articles presented most recently in the field of electrolytes and conductivity. The aim and objectives of research work in this field are to develop methods for the production of high-purity materials and compounds for the preparation of homogeneous and homogeneous mixtures and emulsions. Special attention is given to the development of new methods for the preparation of homogeneous and homogeneous mixtures and emulsions.

Electrolyte and Conductivity Res. Institute, Chernogolovka, Moscow Region, USSR. This book contains a collection of articles presented most recently in the field of electrolytes and conductivity. The aim and objectives of research work in this field are to develop methods for the production of high-purity materials and compounds for the preparation of homogeneous and homogeneous mixtures and emulsions. Special attention is given to the development of new methods for the preparation of homogeneous and homogeneous mixtures and emulsions.

Electrolyte and Conductivity Res. Institute, Chernogolovka, Moscow Region, USSR. This book contains a collection of articles presented most recently in the field of electrolytes and conductivity. The aim and objectives of research work in this field are to develop methods for the production of high-purity materials and compounds for the preparation of homogeneous and homogeneous mixtures and emulsions. Special attention is given to the development of new methods for the preparation of homogeneous and homogeneous mixtures and emulsions.

Tbilisi State U.
Def. at

М. Афанасий Христофор Георгиев. Очерк геометрической
декартовской геометрии. Т. I.

Министерство Культуры Казахской ССР
и Академия Наук Казахской ССР
награждены орденом Трудового Красного Знамени 1950
года, № 1, 27, а. 75 квт. (Знак на рес-
урс. № 1).
Генерал-майор
А. А. Абдусаламов
председатель
Государственного комитета Академии
Наук Казахской ССР.
Генерал-майор
А. А. Абдусаламов
председатель
Государственного комитета Академии
Наук Казахской ССР.

939. A. aborescens Barratt Aut
presents Tropaeolum-like flowers Amer
curo Regnum. 1938. 53 c. [2] una. a.
edn. esp. (See IIMI Boan. Xer.)

Городищев, А. Г. — Сборник № 21.
Санкт-Петербург, 1949, № 2.

Уральская ящерица. — Сборник № 21.
Санкт-Петербург, 1951, № 12.

7. 36. 1949
300. 1951. 20.12.

Советский орден Трудового Красного Знамени, медаль «За доблестный труд в Великой Отечественной войне 1941-1945 гг.», медаль «За боевые заслуги».

Док. №1404-1964. Воронеж. Народное Распределение. Стартовала экспедиция по территории Приморской ССР в 1964, 120 с., [6] авт. А.

Чернозем Георгий Иосифович — 943. Водопровод Альберт
Каменецкий Яков Миронович — 944. Медицина профессор
Бактериологический институт им. Склифосовского — 103. 42 с. (Изд. отд. науки и техники, 1950 г.)

Од. Бородинск Ага Абас

Зап. 1943, 10.6
ст. 141-Сод. ант. 1943-19
рт. бывш. погр. избран.
1943
И. Г. Григорьев Георгий

Заг. № 1042, 15.11.

Сентябрь 1933, 215.
Харбинская Фонд Кинеса.
Прием в Заседании Группы.
Генерал-губернатор в Заседании Группы.
Генерал-губернатор в Заседании Группы.

начале земли по земледелию и
угодам в пределах географического по-
лучения из "Землемер Груз. Гра-
жданской Фамилии ВИЧИ" в Си.

230. 1948, 223.
1948, 152, 6.

Бюл. Изд. с. м.
Зеф. 1948, № 3.

среди 1965, 13, 4.
Донбаское Неск Европей-
ССР. 1953, 19, 1—2.
Украинская Академия Наук. П-
тицы. Книга 1. Том 1. Гл. 1. С. 105—106.

научного прогресса, науки и
техники, а также для содействия
развитию науки и техники в
ССР. 1953. 191 с. вкл. карты, ри-
сунки, фотографии. АН Груз. ССР.

Богданов, А. Т. *Древний Христофор Генрих Мария в Саксонии*. 1942, 4. Заг. 1942, 28.11.
Заг. 1942, 15.4.

Заг. 1954, 26.11.
№ 46. Альбом Христофор Ге-
оргович. Опыт фольклористи-

71
Illustration for Chapter 2
Confidence Intervals

卷之三

APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R000615530004-7"

GOGISHVILI, K.S.

Possibility of determining absolute minimums of atmospheric temperature in the mountains from a brief series of observations. Soob.AM
Gruz.SSR 17 no.9:797-800 '56. (MLRA 10:2)

1. Akademiya nauk Grusinskoy SSR, institut geografii imeni Vakhushti,
Tbilisi. Predstavлено академиком A.N.Dzhavakhishvili.
(Georgia--Atmospheric temperature)

GOGISHVILLI, K.S.

Some characteristics of atmospheric processes hindering the
passage of cold air into the southern Caucasus. Meteor. i gidrol.
no.3:37-40 Mr '57. (MLRA 10:5)
(Caucasus--Atmosphere)

GOGISHVILLI, K. S.

Structural schemes of altitudinal baric areas in the forecast of
main cooling processes in Transcaucasia. Soob. AN Gruz. SSR 19 no.3:
301-307 S '57. (MIRA 11:5)

1. Akademiya nauk Gruzinskoy SSR, Institut geografii im. Vakhushti
Tbilisi. Predstavлено академиком А. Н. Дзхавахишвили.
(Weather forecasting) (Georgia--Frost)

GOGISHVILI, K.S.

Climate of Upper Imeretia and the factors accounting for it
[in Georgian with summary in Russian]. Trudy Inst. geog. AN
Gruz. SSR 10:111-121 '58, (MIRA 12:8)
(Imeretia--Climate)

ASTAKHOV, N.Ye.; VLADIMIROV, L.A.; GOGISHVILI, K.S.; KORDZAKHIYA, M.O.;
MARUASHVILI, L.I.; SOKHADZE, Ye.V.

Physicogeographical characteristics of Upper Imeretia. Trudy Inst.
geog. AN Gruz. SSR 10:155-193 '58. (MIRA 12:8)
(Imeretia--Physical geography)

GOGISHVILI, K. S.

Seasonable distribution of atmospheric precipitations in southern Georgia. Trudy Inst. geog. AM Gruz. SSR 12:159-181 '59.
(MIRA 13:10)
(Georgia--Precipitation (Meteorology))

GOGISHVILI, K.S.; KORDZAKHIYA, M.O.

Atmospheric humidity deficit in Georgia. Trudy Inst. geog. AN
Gruz. SSR 17:139-152 '62. (MIRA 16:7)
(Georgia—Humidity)

GOGISHVILI, K.S.; KORDZAKHIYA, M.O.

Problem of moisture in Georgia. Trudy Inst. geog. AN Gruz. SSR
17:153-160 '62. (MIRA 16:7)

(Georgia—Humidity)

GOGISHVILI, K.S.

Seasonal distribution of atmospheric precipitation in eastern Georgia. Trudy Geog. ob-va Gruz. SSR 6:147-171 '63.
(MIRA 17:2)

GOGISHVILI, K.S.

Circulatory factors in the climate of western Georgia.
Trudy Inst. geog. AN Gruz. SSR 18:214-215 '64.

(MIRA 17:6)

GOGISIVILI, K.S.

Circulational factors in the climate of the eastern Georgia.
Trudy Inst. geog. AN Gruz. SSR 20:175-193 '64.

(MIRA 18:5)

SOV/137-58-8-16663

Translation from: Referativnyy zhurnal, Metallurgiya, 1958, Nr 8, p 60 (USSR)

AUTHORS: Agladze, R.I., Gofman, N.T., Gogishvili, N.Sh.

TITLE: Extraction of Manganese by Leaching of Usa Ores (Izvlecheniye margantsa iz usinskikh rud vyshchelachivaniyem)

PERIODICAL: V sb.: Elektrokhimiya margantsa. Tbilisi, AN GruzSSR, 1957, pp 465-482

ABSTRACT: Experiments were run in 1- and 2-stage leaching (L) of Usa Mn chlorite-carbonate ore (~30% Mn) with acid anolyte. A study is made of the effect of the degree of comminution of the ore, pulp temperature, and the stoichiometric Mn-ore: H₂SO₄ and solid-to-liquid ratios upon the degree of recovery of the Mn and the other components of the ore. Single-stage L by a solution containing 75 g H₂SO₄ yields 71% recovery of Mn from ore in solution when the Mn-ore:H₂SO₄ ratio is ~1:1 and the solid-to-liquid ratio ~1:9 at a temperature of 20°. The consumption of H₂SO₄ in extracting Mn in an open-end process is 66% of the amount fed in, and the ore residue after L contains up to 13% Mn. The requirements per t Mn are 6.33 t ore, 2.012 t H₂SO₄.

Card 1/2

SOV/137-50-6-1003

Extraction of Manganese by Leaching of Usa Ores

0.388 t NH₃, and 19.43 m³ water. For 2-stage L by solution containing 75 g H₂SO₄/liter, at an Mn-ore:H₂SO₄ ratio of 1:3.3 in the acid arm and 1:1 in the neutral arm and a solid-to-liquid ratio ~1:8, extraction of Mn attains 84% of the starting amount. The residue of ore after L twice contains 4-7% Mn. The degree to which the other components of the ore go into solution virtually doubles the extraction thereof in single-stage L. The requirements per t Mn are 5.3 t ore, 1.883 t H₂SO₄, 0.381 t NH₃, and 18.517 m³ water.

The behavior of individual ore components in the resultant caustic solution and in electrolysis is examined, and data are presented on the accumulation thereof in the electrolyte. Electrolysis of purified solutions shows that it proceeds with standard indices and permits extraction of metal of normal quality. Energy consumption is 9.3 kwh/kg Mn.

N. P.

1. Manganese--Production 2. Manganese ores--Processing;

Card 2/2

12/12/00
S/081/62/000/003/046/090
B156/B101

AUTHORS: Agladze, R. I., Gogishvili, N. Sh.

TITLE: Production of antimony-manganese alloy by electrolysis of molten salts

PERIODICAL: Referativnyy zhurnal. Khimiya, no. 3, 1962, 368, abstract 3K154. (Tr. Gruz. politekhn. in-t, no. 4 (65), 1959, 101-115)

TEXT: The process of producing Sb-Mn alloys (10-49.3% Mn) from molten $MnCl_2 + KCl + BaCl_2$ is investigated; the cathode is molten metallic Sb (99.87% Sb). It has been found that increasing cathodic current density from 0.25 to 1 a/dm² is accompanied by a decrease of the cathodic current yield from 93 to 77% (temperature 850°C), from 95 to 80% (900°C), and from 97 to 90% (950°C). Under these conditions, the Mn content of the alloy is 23-31%. Increase in the Mn content of the alloy from 10 to 49.3% is accompanied by a decrease of the cathodic current yield from 95 to 90%. Card 1/2

Production of antimony-manganese alloy ... S/081/62/00C/003/046/090
B156/B101

The structures of the alloys produced have been investigated, and it has been found that the structure of alloys containing 28-31.1% Mn is characteristic of β -phase. Alloys with >40% Mn contain chemical compounds. [Abstracter's note: Complete translation.]

Card 2/2

"APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R000615530004-7

GOGISHVILI, N.Sh.

Extraction of manganese from carbonate ores of Chiatura deposits.
Trudy Inst. prikl. khim. i elektrokhim. AN Gruz. SSR 2:61-78 '61.
(MIRA 16:8)
(Manganese) (Chiatura—Ores)

APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R000615530004-7"

GOGISHVILI, N.Sh.

Full utilization of Chiatura carbonate ore. Trudy Inst. prikl.
khim. i elektrokhim. AN Gruz. SSR 2:79-81 '61. (MIRA 16:8)

(Chiatura---Ores)

AGLADZE, R.I.; GOGISHVILI, N.Sh.

Stripping of Chiatura carbonate ores by percolation. Trudy Inst.
prikl. khim. i elektrokhim. AN Gruz. SSR 2:83-94 '61.
(MIRA 16:8)

(Chiatura—Ores)

(Percolation)

GOGISIVILI, N.Sh.; AGLADZE, R.I., akademik

Effect of germanium ions on the electrodeposition of manganese.
Soob. AN Gruz. SSR 40 no.1:105-111 O '65.

(MIRA 18:12)

1. Institut neorganicheskoy khimii i elektrokhimii AN Gruzinской
SSR. Submitted December 28, 1964.

600615530004-7
S/011/63/000/001/002/002
A006/A101

AUTHOR: Azizbekov, Sh. A.

TITLE: The Third All-Union Conference on regularities in the formation
and distribution of endogenous mineral resource deposits

PERIODICAL: Izvestiya Akademii nauk SSSR, Seriya geologicheskaya, no. 1, 1963,
126 - 128

TEXT: The Conference was held in Baku from September 18 to 23, 1962; it
was attended by 455 representatives from scientific and industrial geological
organizations including 24 Academicians and Corresponding Members of AS USSR and
AS of various republic, 49 Doctors-Professors and 164 Candidates of Geological
and Mineralogical Sciences. The Conference was opened by Academician D. I.
Shcherbakov, secretary of OON, AS USSR. The program of the Conference was di-
vided into three main groups: a) regularities in the formation and distribution
of endogenous deposits in the Caucasus; b) regularities in the formation and
distribution of endogenous deposits of other folding regions of the Alpine cy-
cle; c) general problems of metallogeny. In group a) reports on basic features

Card 1/2

S/011/63/000/001/002/002
A006/A101

The Third All-Union Conference on...

of metallogeny and models of detailed metallogenic charts of the Caucasus were delivered by Sh. A. Azizbekov and R. N. Abdullayev (in Azerbaijan), S. S. Mkrtchyan (in Armenia), G. A. Tvalchrelidze and Yu. I. Nazaryov (in Georgia) and V. I. Orobey (in the Northern Caucasus); V. I. Smirnov reported on peculiarities in magnetism and metallogeny of the geosyncline and plateau stage in the evolution of the Western section of Northern Caucasus. Reports were delivered on magnetism and metallogeny in the Dashkesan ore region (M. A. Kashkay, M. A. Mustafabeyli) Southern Georgia (V. R. Nadiradze) the Sevan-Akera zone (S. M. Suleymanov) the Alaverdy-Bolina ore region (T. Sh. Gogishvili) and in the small Caucasian intrusives. G. S. Dzotsashidze reported on "Paleogenous volcanism in the Caucasus and metallogeny related to it"; V. N. Kotlyar on "Deposit types related to paleo-volcanism"; papers were delivered on pyrite deposits in the Somkhito-Karabakh and the Sevan-Akera zone (P. F. Sopko); Northern Caucasus (N. S. Skripchenko, V. I. Budze) the Chubukhlu-Tanzutsk ore region (S. Sh. Sarkisyan). Reports were read on polymetallic deposits in Northern Caucasus (A. M. Krasnovidova), North-West Caucasus (G. P. Kornev) and the Mekhmany ore field (N. V. Zaytseva). Other reports dealt with gold (N. Ye. Gukman, D. G. Salija) mercury (D. V. Abuyev) and rare metal (F. V. Mustafabeyli) mineralisation. Group 2 included reports on

Card 2/4

GOGISHVILI, V.G.; GOGISHVILI, T.Sh.

Metallogeny of the Alaverdi-Bolnisi ore region. *Zakonom.razm.*
polezn.iskop. 7:369-370 '64. (MIRA 17:6)

1. Kavkazskiy institut mineral'nogo syr'ya.

GOGISHVILI, V.G.

Seladonite from the vicinity of Tiflis. Geol.sbor. [Kavk.]
no.1:134-136 '59. (MIRA 13:1)
(Tiflis region--Silicates)

GOGISHVILI, V.G.; NADAREYSHVILI, V.K.

Hydrothermal anhydrite from the Dzhindarinskoye copper deposit.
Geol.sbor. [Kavk.] no.1:137-139 '59. (MIRA 13:1)
(Anhydrite)

GOGISHVILI, V. G., Cand Geol-Mineral Sci -- (diss) "Hydrothermal metasomites of the Khamsk Ore region (South Georgia) and Certain questions of ore formation," Tbilisi, 1960, 26 pp, 180 copies (Tbilisi State U. im Stalin/ Caucasus Institute of Mineral Resources of the Ministry of Geology and Preservation of Mineral Resources USSR) (KL, 48/60, 113)

GOGISHVILI, V.G.; ZULIASHVILI, T.G.; KALANDARISHVILI, N.A.

Alteration of ore enclosing rocks of sulfide deposits in
the Alaverdi ore region and their prospecting importance.
Geol. sbor. [Kavk.] no.2:187-211 '62. (MIRA 17:1)

GOGISHVILI, V.G.; GOGISHVILI, T.Sh.

Metallogeny of the Alaverdi-Bolnisi ore region. Zekonom, razm.
polezn. iskop. 71369-370 '64. (MIRA 1716)

1. Kavkazskiy institut mineral'nogo syr'ya.

GOGISVANIDZE, G. Ya.

GOGISVANIDZE, G. Ya. --"Certain Problems of Kinematic and Power Investigation of Universal Tangential Thread-Cutting Heads." *(Dissertations for Degrees in Science and Engineering Defended at USSR Higher Educational Institutions) Min of Higher Education USSR, Georgian Order of Labor Red Banner Polytechnic Inst imeni S. M. Kirov, Tbilisi, 1955

SC: Knizhnaya Letopis'; No. 25, 18 Jun 55

* For Degree of Candidate in Technical Sciences

GOGITASHVILI, G., kand.tekhn.nauk (L'vov)

Self-ignition of the planking in bucket conveyors. Posh.
deleno 5 no.12:8 D '59. (MIRA 13:4)
(Flour mills--Fires and fire prevention)

GOGITASHVILI, G.G.

Improvement of safety techniques in industrial distilling plants.
Spirt.prom. 20 no.2:21-22 '54. (MIRA 7:6)
(Liquor industry--Safety measures)

GOGITASHVILI, G.G.; ZALGIN, N.S., redaktor; RUDENSKIY, Ya.V., tekhnicheskiy
redaktor

[Safety manual for workers in chemical laboratories] Pamiatka po
tekhnike bezopasnosti dlia rabotnikov zavodskikh khimicheskikh labo-
ratori. Kiev, Gos. nauchno-tekhn. izd-vo mashinostroit. lit-ry.
Ukrainskoe otd-nie, 1955. 50 p.
(MIRA 10:1)
(Chemical laboratories)

GOGITASHVILI, G.G.

Ventilation of the cooking sections in alcohol plants. Spirit.prom.
22 no.2:34-35 '56. (MLBA 9:8)

1. L'vovskiy politekhnicheskiy institut.
(Factories--Ventilation)

GOGITASHVILI, G.G.

Ventilation of fermenting sections. Spirt. prom. 22 no.4:
20-21 '56. (MLRA 10:2)

1. L'vovskiy politekhnicheskiy institut.
(Ventilation) (Fermentation)

OOGITASHVILI, G. G. Cand Tech Sci -- (diss) ~~XXX~~ "Study of
the Cause of Traumatism in Alcohol Industry Plants and ^{Memo for} ~~Ways of~~
Improving ~~the~~ Working Conditions." L'vov, 1957. 17 pp with
illustrations, 22 cm. (Min of Higher Education Ukrainian SSR,
L'vov Polytechnic Inst), 100 copies (KL, 27-57, 106)

- 30 -

GOGITASHVILI, G.G.

Lightning protection for distilling plants. Spirt. prom. 25 no.4:
40-42 '59. (MIRA 12:?)
(Distilleries) (Lighting protection)

GOGITASHVILI, G., kand.tekhn.nauk, dots.

Where there is a will there is a way. Okhr.truda i sots.strakh.
no.1:40-41 Ja '60. (MIRA 13:5)

1. L'vovskiy politekhnicheskiy institut, kafedra tekhniki
bezopasnosti. (Industrial hygiene)

GOGITASHVILI, G.G.

Safety measures and fire hazard prevention at liqueur and vodka
plants. Spirit.prom. 26 no.3:23-24 '60. (MIRA 13:10)
(Liquor industry--Safety measures)

GOGITASHVILI, Georgiy Grigor'yevich; SEREBROVA, I.M., inzh.,
retsentent; CHIZHOVA, N.M., inzh., retsentent;
PRITYKINA, L.A., red.; SATAROVA, A.M., tekhn. red.

[Safety measures in the liqueur and vodka, wine, and soft
drinks industry] Tekhnika bezopasnosti v likero-vodochnoi,
vinodel'cheskoi i bezalkogol'noi promyshlennosti. Moskva,
Pishchepromizdat, 1963. 155 p. (MIRA 16:6)

(Distilling industries--Safety measures)

(Wine and wine making--Safety measures)

(Soft drinks)

GOGITASHVILI, Georgiy Grigor'yevich; YAROTSKIY, V.D., red.; STARODUB,
T.A., tekhn. red.

[Prevention of poisoning at chemical plants] Profilaktika
otravlenii na khimicheskikh predpriyatiakh. Kiev, Gos-
tekhizdat USSR, 1961. 75 p. (MIRA 16:5)
(Chemical plants--Hygienic aspects)

GOGITASHVILI, G.S.

Preparation of antipasteurellosis serum from milk. Soob, AM Gruz.
SSR 35 no.3:657-661 S '64. (MERA 17:11)

GOGITIDZE, F.

Manual for marine engineers. Mor. flot 23 no.8:44-45 Ag '63.
(MIRA 16:11)

1. Starshiy mekhanik teplokhoda "Uritsk" Chernomorskogo
parokhodstva.

GOGITIDZE, G.V.

New method of surgical restoration of the patency of occluded fallopian tubes, experimental study. Akush. i gin. no.137-40 '63.

1. Iz laboratorii eksperimental'noy khirurgii (zav. - O.A. Gotsiridze), konzul'tant laboratorii - seniornyy doktor! nauci prof. I.G. Mamantvishvili) Nauchno-issledovatel'skogo instituta fiziologii i patologii zhenshchiny (dir. - prof. I.F. Zhordania [deceased]) Ministerstva zdravookhraneniya Gruzinskoy SSR.

L 111544-07 KWT(m)/T FDN/WE/GD

ACC NR: AT6015191 (A,N) SOURCE CODE: UR/0000/66/000/000/0018/0026

AUTHOR: Gogitidze, L. D.; Makarenkov, V. V.; Panchenkov, G. M.;
Pustyrev, O. G.; Yakovlevskiy, V. V.

/4

B11

ORG: none

TITLE: Method of evaluating combustion characteristics of hydrocarbon
fuels on a chamber type burner

SOURCE: Metody otsenki ekspluatatsionnykh svoystv reaktivnykh topliv i
smazochnykh materialov (Methods for the performance evaluation of jet
propellants and lubricants). Moscow, Izd-vo Mashinostroyeniye, 1966,
18-26

TOPIC TAGS: petroleum fuel, combustion characteristic, combustion
kinetics, combustion chamber test, gas turbine engine test

ABSTRACT: The use of a small chamber type diffusion burner (see Fig. 1)
for determining completeness of fuel combustion was evaluated. Total
fuel consumption in the burner used, scaled down as much as possible
while still simulating the combustion chamber in a gas turbine engine,
was only 150-200 ml per run. Completeness of combustion was determined
with an accuracy of better than 2.5%. There is qualitative agreement
between these results and those obtained in an actual gas turbine engine
chamber. Orig. art. has: 4 figures and 1 table.

Card 1/2

UDC: 662.753.22:629.13.001.4

L.C. 574-57

ACC NR: AT6015191

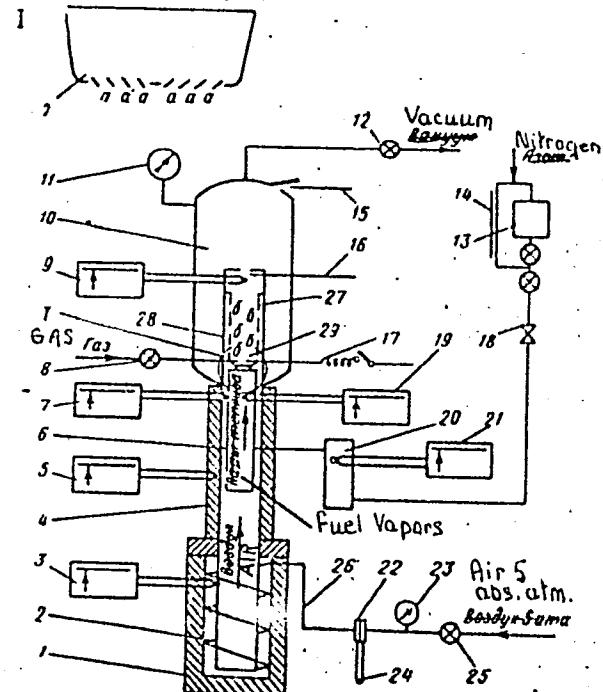


Fig. 1. Diagram of chamber type diffusion burner installation:
 1--electric furnace, 2--coil, 3--thermostat, 4-- electric tape, 5--thermostat, 6--fuel evaporator, 7--thermostat, 8--gas valve from supply line, 9--thermostat, 10--pressure chamber, 11--vacuum gage, 12--regulator valve, 13--fuel tank, 14--microburette, 15--safety valve, 16--thermocouple, 17--ignition coil with electrode for igniting fuel, 18--regulator valve, 19--thermostat, 20--electric furnace, 21--thermostat, 22--measuring nozzle, 23--manometer, 24--piezometer, 25--air valve, 26--air feed from compressor, 27--fire tube, 28--fire tube mantle, 29--burner.

Card 2/2 go SUB CODE: 21, 14/ DATE SUBM: 10Dec65/ ORIG REF: 004

L 02299-62 EWT(m)/T FDN/WE/GD
ACC NR: AT6015199 (A,N)

SOURCE CODE: UR/0000/66/000/000/0087/0095

AUTHOR: Gogitidze, L. D.; Logvinyuk, V. P.; Makarenkov, V. V.; b6
Malyshev, V. V.; Panchenkov, G. M.; Yakovlevskiy, V. V.; b1
B+1

ORG: none

TITLE: Determining nonstationary solubility of gas in hydrocarbon fuels

SOURCE: Metody otsenki ekspluatatsionnykh svoystv reaktivnykh topliv i smazochnykh materialov (Methods for the performance evaluation of jet propellants and lubricants). Moscow, Izd-vo Mashinostroyeniye, 1966, 87-95

TOPIC TAGS: petroleum fuel, fuel property, solubility, diffused gas, applied mathematics, aircraft fuel tank

ABSTRACT: A simple method was worked out and equipment was designed for determining the solubility and the diffusion coefficient of a gas in liquid under nonstationary conditions. This involves direct measurement of the volume of gas dissolved in the liquid (see Fig. 1). Conditions approximate those in the wing tanks of heavy subsonic aircraft. Equations given for calculating the nonstationary solubility of gas in a liquid enable one to calculate the gas concentration according to the

UDC: 662.753.22:629.13.001.4

Card 1/3

L 02299-67

ACC NR. AT6015199

3

depth of the fuel layer and to calculate the total amount of dissolved
gas at any time. "....experimental points (showing solubility of CO₂
in hydrocarbon fuel) were provided by Tikhonov, N. I., Vinogradov, Yu. V.,
and Morozov-Rostovsk, N. V." Orig. art. has: 6 figures and 15 equations.

Cord 2/3

L 02299-67

ACC NR: AT6015199

2

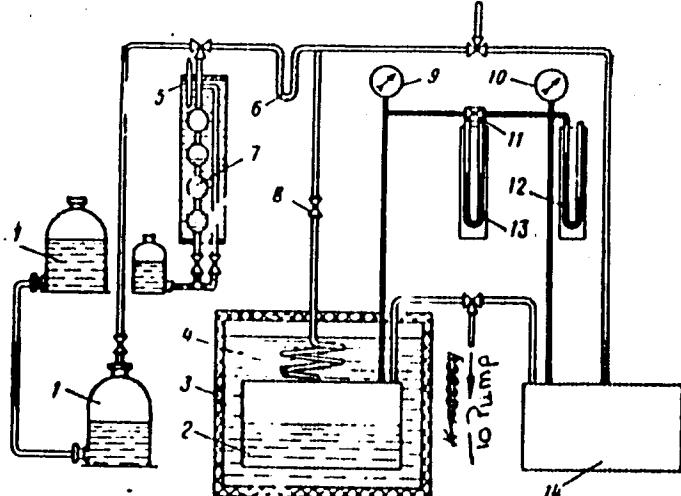


Fig. 1. Diagram of apparatus for determining diffusion coefficient and solubility of gases in fuel: 1--reservoir for storing and delivering gas to be studied, 2--diffusion tank, 3--thermostat, 4--coil, 5--thermometer, 6--dryer for gas, 7--gas measuring burette VTI-2, 8--needle valve, 9, 10--vacuum gage, 11--4-way cock, 12--mercury piezometer, 13--slanted water piezometer, 14--calibrated tank.

SUB CODE: 21, 14/ SUBM DATE: 10Dec65/ ORIG REF: 005
Card 373 ymb

L 04543-67 EWT(m)/T FLM/WB/CD

ACC NR: AT6015200 (A,N) SOURCE CODE: UR/0000/66/000/000/0096/0098

AUTHOR: Borisov, V. D.; Gogitidze, L. D.; Logvinyuk, V. P.; Makarenkov, V. V.; Malyshev, V. V.; Panchenkov, G. M.; Yakovlevskiy, V. V.

ORG: none

TITLE: Apparatus for determining the amount of gas dissolved in a liquid

SOURCE: Metody otsenki ekspluatatsionnykh svoystv reaktivnykh topliv i smazochnykh materialov (Methods for the performance evaluation of jet propellants and lubricants). Moscow, Izd-vo Mashinostroyeniye, 1966, 96-98

TOPIC TAGS: gas analysis, gas analyzer, solubility, petroleum fuel,
Liquid PropertyABSTRACT: A simple apparatus for determining the amount of gas dissolved in a liquid was designed so that it could be used as a gas pipette for VTI, Orsat or other gas analyzers. A special feature of the apparatus (see Fig. 1) is the use of an elastic membrane to equalize the pressure between the measuring burette and the surrounding space, and measurement of the volume of liberated gases at different pressures and temperatures. A deviation of 3.5% was found in the measurement of gasses separated from a hydrocarbon fuel. Water and other liquids may be used in the determinations. Orig. art. has: 1 table and 1 figure.

Card 1/2

UDC: 662.753.22:629.13.001.4

14

Pt!

ACC NR: AT6015200

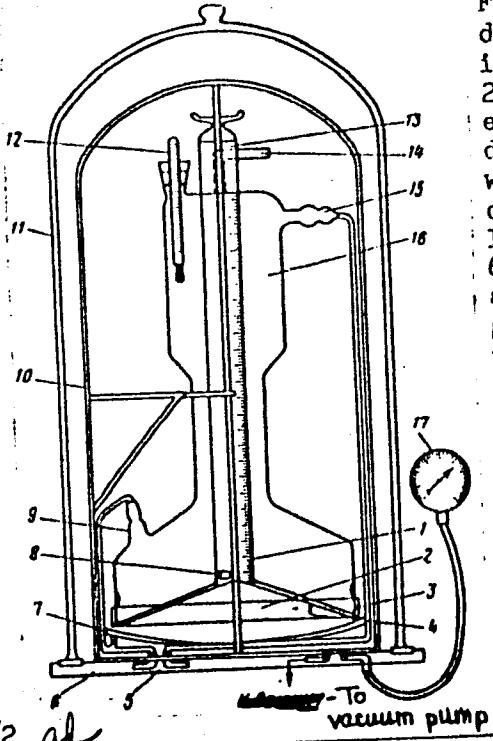


Fig. 1. Diagram of apparatus for determining amount of gas dissolved in liquid: 1--measuring burette, 2--conical funnel, 3--clamp, 4--elastic membrane (double line designates cross section of funnel 2 with membrane lying on it), 5--connector for feeding thermostatic liquid or gas to pressure chamber, 6--base, 7--lower heat shield, 8--activator, 9--connector for feeding gas or liquid, 10--housing, 11--vacuum jar, 12--thermometer, 13--ground glass stopper, 14--channel, 15--connector for withdrawing gas or liquid, 16--housing, 17--vacuum gage.

SUB CODE: 21, 14/ SUBM DATE:
10Dec65

Card 2/2 gd

GOGITIEZE, O.A.; MANDZHAVIEZE, Z.Sa., K.N. SHVILLI, N.S.; TSERELOV, A.A.;
SHTAYERMAN, A.Yu.

A 340-liter expansion-condensing chamber for studying high-energy particle interaction. Fiz. chast. vys. energ. no.1:91..
96 '65. (MIRA 18:12)

L 19639-63
ACCESSION NR: AP3007064

EWT(m)/BDS AFFTC/ASD

S/0056/63/045/003/0469/0473

AUTHORS: Anikina, M. Kh.; Gogitidze, O. N.; Zhuravleva, M. S.; ¹²
Kozlov, A. A.; Kotlyarevskiy, D. M.; Mandzhavidze, Z. Sh.; Mestvir-
ishvili, A. N.; Nyagu (Neagu), D.; Okonov, E. O.; Petrov, N. I.; ⁴⁶
Rozanova, A. M.; Rusakov, V. A.; Takhtamyshov, G. G.; Chkhaidze,
L. V.; Wu Tsung-fan; Tserelov, A. A.

TITLE: Observation of the decays $K_2^0 \rightarrow \pi^+ + \pi^- + \pi^0$

SOURCE: Zh. eksper. i teoret. fiziki, v. 45, no. 3, 1963, 469-473

TOPIC TAGS: neutral kaon decay, four charged particle decay, decay probability, proton synchrotron, cloud chamber

ABSTRACT: Four decays of long-lived K^0 mesons with concomitant emission of four charged particles have been observed in a cloud chamber bombarded by a neutral particle beam from the OIYaN (Joint Inst. of Nuc. Research) proton synchrotron. All four events are identified

Card 1/3

L 19639-63
ACCESSION NR: AP3007064

2

as the decays

$$K_1^0 \rightarrow \pi^+ + \pi^- + \pi^0 \xrightarrow{\gamma} e^+ + e^- \quad (1)$$

An estimate of the probability of the decay $K_2^0 \rightarrow \pi^+ + \pi^- + \pi^0$ relative to all K_2^0 decays involving secondary particles yields a value 0.08 ± 0.04 . "In conclusion, the authors express their gratitude to engineers N. Rusishvili and A. Yu. Shtayerman of the Physics Institute of the Georgian Academy of Sciences, who participated in the construction and adjustment of the cloud chamber. The authors are also grateful to the proton cyclotron crew and to the group of laboratory assistants. The authors are most grateful to V. I. Veksler and B. M. Pontecorvo for interest in the work and for numer-

Card 2/3

L 19639-63

ACCESSION NR: AP3007064

ous discussions, as well as to E. L. Andronikashvili and V. P. Dzheleopov for interest and collaboration." Orig. art. has: 1 figure, 2 formulas, and 2 tables.

ASSOCIATION: Ob"yedinenyyi institut yadernykh issledovaniy (Joint Institute of Nuclear Research); Institut fiziki Akademii nauk Gruzinskoy SSR (Physics Institute, Academy of Sciences, Georgian SSR)

SUBMITTED: 02Apr63 DATE ACQ: 08Oct63 ENCL: 00

SUB CODE: PH NO REF SOV: 002 OTHER: 003

Card 3/3

GOGITIDZE-IVASHCHENKO, T. A.

"A Study of the Influence of Certain Factors on the Flotability of High-Ash Coal."
Cand Tech Sci, Inst of Mining, Acad Sci USSR, 24 Dec 54. (VM, 15 Dec 54)

Survey of Scientific and Technical Dissertations Defended at USSR Higher Educational
Institutions (12)

SO: SUM No. 556, 24 Jun 55

GOGITIDZE, T.A.

✓ 117. FLotation OF IRON OXIDE BY INDUSTRIAL METALLURGISTS
T.M. (Trudy Inst. Metal., Leningrad, USSR), 1954, vol. 1, no. 1, p. 150.
Zh. Khim. (Ref. J. Chem., Moscow), 1956, (18), 3603.
The flotation properties of the following non-
oxidized, sulfurized and ordinary (Oxy) ferroalloys,
copper, copper-nickel, oil, and petroleum, magnetite
and titanite were studied. It was found that in all
substances, these reagents reduced the time required
5-7 min; this means that the rate of the flotation
by half. The best results were obtained from Oxy
the prospective use of said reagent should be
discussed.

GOGITIDZE, T. A.

✓The influence of the surface oxidation of some bituminous coals upon their floatability. T. A. Gogitidze and I. N. Plakshin. *Izdat. Akad. Nauk S.S.R. Otdel. Tekhn. Nauk* 1956, No. 11, 77-81.—The coal floatability is slightly but rapidly impaired by storage of coal in air, i.e. the ash content in the tailings drops after 8 months' storage from 51 to 49%, and in 1 more year to 43-45%. Tests were run on coal floatation after artificial oxidation of the coal surface with O_2 at 0 under pressure, 40% H_2O_2 soln., and with $KMnO_4$ soln. (5% of the coal wt.). H_2O_2 lowers the ash content of the tailings, by 0-10%. Alk. $KMnO_4$ can oxidize coal almost completely. Neutral $KMnO_4$ was found to affect the floatability by first reducing it in 2 days to 23.6, then increasing it in 4 additional days to 31.0, and again reducing it in 6 more days to 34.3%. The floatability of fresh coal can be completely destroyed with $KMnO_4$. AcOH formation in the coal oxidation with $KMnO_4$ was proven experimentally. The floatability can be partially or completely restored by boiling coal with H_2O_2 , by heating it in vacuum to 40-60°, and by chem. reduction of the coal surface (benzidine, anthracene) in 1% NaOH soln.

W. M. Stenhouse

GOGITIDZE, T.A.

Effect of certain factors on flotation time length for high-ash
coal sludge. Trudy Inst.met. AN Gruz.SSR 9:343-347 '58.
(MIRA 12:8)

(Coal preparation) (Flotation)

GOGITIDZE, T.A.

Choice of effective reagents from petroleum oil residues for the
flotation of coal slime. Trudy Inst.gor.dela AN Gruz.SSR
2:173-185 '60. (MIRA 14:10)
(Flotation--Equipment and supplies)

5(3)

AUTHORS: Yershova, L. V., Gogitidze, V. N., Belikov, V. M., Novikov, S. S. SOV/62-59-5-35/40
TITLE: Preparation of Gem-dinitroparaffins (O poluchenii gem-dinitroparafinov)
PERIODICAL: Izvestiya Akademii nauk SSSR. Otdeleniye khimicheskikh nauk, 1959, Nr 5, pp 943-945 (USSR)
ABSTRACT: For the investigation of the influence exercised by the carbon chain in the gem-dinitro-compounds upon their physical properties the homologous series of gem-dinitro-compounds was synthetized. For this purpose the alkyl acetoacetic esters were nitrated. This method was applied for the first time by G. Chancel (Ref 1). It renders it possible to extend the carbon chain in stages, i.e. the initial product is extended each time by one carbon atom. In the course of the present investigation, a series of gem-dinitroparaffins from 1,1-dinitropropane to 1,1-dinitrodecane was in this way obtained. Of the synthesized compounds, the molar refraction of the dinitromethyl group was determined (Table 1). Moreover, also the physical constants and boiling points were determined (Table 2). There are 2 tables and 6 references, 1 of which is Soviet.

Card 1/2

Preparation of Gem-dinitroparaffins SOV/62-59-5-35/40

ASSOCIATION: Institut organicheskoy khimii im. N. D. Zelinskogo Akademii nauk SSSR (Institute of Organic Chemistry imeni N. D. Zelinskogo of the Academy of Sciences, USSR)

SUBMITTED: November 11, 1958

Card 2/2

BUNICH, P.G., kand.ekon.nauk, starshiy nauchnyy sotrudnik; PAKHOMOV, A.M., kand.ekon.nauk, starshiy nauchnyy sotrudnik; BUDAVEY, V.Yu., nauchnyy sotrudnik; IVANOV, Ye.A., nauchnyy sotrudnik; KIRILLOV, I.A.. prof.. doktor ekon.nauk; KOVALEVA, A.M., kand.ekon.nauk; SAFRAY, G.Ye., kand.ekon.nauk; YAKOBSON, M.O., prof., doktor tekhn.nauk; ~~QOGITISHVILI~~, R.N., inzh.; KHABUR, B.P.; BRODIE, I.M.; FILATOV, N.L.; BLAZHEY, Zdenko, doktor, ekonomist (Chekhoslovatskaya Respublika); NESHVER, Vatslav, inzh., ekonomist (Chekhoslovatskaya Respublika); RYUMIN, S.M., red.; ZAVERNYAYEVA, L., red.izd-va; LEBEDEV, A., tekhn.red.

[Planning and financing of major repairs on fixed assets] Planirovanie i finansirovaniye kapital'nogo remonta osnovnykh fondov. Moskva, Gosfinizdat, 1958. 223 p. (MIRA 12:2)

(Continued on next card)

BUNICH, P.G.--(Continued) Card 2.

1. Moscow. Nauchno-issledovatel'skiy finansovyy institut. 2. Nauchno-issledovatel'skiy finansovyy institut (for Bunich, Pakhomov). 3. Nauchno-issledovatel'skiy ekonomicheskiy institut Gosplana SSSR (for Ivanov). 4. Moskovskiy inzhenerno-ekonomicheskiy institut im. S. Ordzhonikidze (for Safray). 5. Eksperimental'nyy nauchno-issledovatel'skiy institut metallorezhushchikh stankov (for Gogitishvili). 6. Zamestitel' direktora TSentral'nogo nauchno-issledovatel'skogo instituta morskogo flota (for Khabur). 7. Nachal'nik finansovogo otdela sovmarkhoza Tatarskoy ASSR (for Broyde). 8. Ekspert Ministerstva finansov SSSR (for Filatov). 9. Investitsionnyy bank (for Blashey). 10. Tekhniko-organizatsionnyy nauchno-issledovatel'nyy institut mashinostroyeniya (for Neshver).

(Industry--Finance)

GOGITZ, Antal

Let increase the mass base for the innovation movement. Ujít lap 13
no.12:9 Je '61.

1. Vasas Szakszervezet Budapesti Biszottsaga Termelési Osztályának
vezetője,

(Hungary—Industrial management)
(Hungary—Socialist competition)

GOGIYA, G.; TOROTADZE, E., red.; KOKAIYA, A., tekhred.

[Tiflis, a brief guidebook] Tbilisi; kratkii putevoditel'.
Tbilisi, Gos.izd-vo "Sabchota Sakartvelo," 1958. 53 p. (MIRA 11:12)
(Tiflis--Guidebooks)

4-25-75, A. G.
USSR/Cultivated Plants - Fruits. Berries.

Abs Jour : Ref Zhur - Biol., No 10, 1953, 44203

Author : Gogolya, N.G.

Inst : "

Title : Horticulture in Abkhazia.

Orig Pub : Sad i ogorod, 1957, No 11, 25-26.

Abstract : No abstract.

Card 1/1

GOGIYA, V. T.

Gogiya, V. T.: "The dynamics of tanning extracts in the ripening of tea seeds", Byulleten' Vsesoyuz. nauch.-issled. in-ta chaya i subtrop. kul'tur 1949, No. 3, p. 109-14, - Bibliog: 15 items.

SO: U-3042, 11 March 53, (Letopis 'nykh Statey, No. 10, 1949).

CA

//

Formation of tannins and dynamics of oxidizing enzymes during sprouting of tea seeds. V. I. Kosolapoff, B. M. Kozhevnikova, Chelobit' Prezidium, Moscow No. 6/70-81(1950). Tannins of the tea plant form at the time of seed sprouting after swelling of the seed. The process is not dependent on illumination. The primary products are ether-sol. Along with their formation there proceeds an accumulation of all soluble tannins. As the plant grows tannins accumulate in all of its parts, largely in leaves and bark. Fibrolated sprouts show unusually high Et(O)sol. fraction of tannins and high activity of oxidases in comparison with green plants. Polyphenoloxidase appears during the sprouting in the embryo plant at the site of highest rate of synthesis of tannins, but its activity lags behind that of peroxidase. Polyphenoloxidase activity remains fairly constant through the aging of the plant while peroxidase continues to rise in activity. G. M. Kosolapoff

CA

12

Pectic substances of the tea leaf. V. T. Gogira. *Hook. Iwamiya Chikago Prezessing Shorish No. 6.* 183-90(1950).
Pectins can serve as a useful quality index of the tea leaf. Best quality is indicated by high content of hydriopectin and least of protopectin. Max. hydriopectin levels are reached in late summer months in the plant. During processing of tea the pectin suffer changes, as even heat-treatment lowers their content. The leaf contains pectinase and protopectinase; the action of the former increases the water-sol. fraction of pectic matter which lowers tea quality, while the protopectinase activity declines as the tea leaf quality declines so that this phenomenon tends to preserve tea quality. The destruction of protopectin during the wilting and mechanical treatment of the leaf causes softening of the structure, facilitating the treatment. Tea pectins are analogous to those of other plants, having the nucleus (of pectic acid) of galacturonic acid whose content ranges from 81 to 82%. Both black and green tea contain apparently the di-Me ester of galacturonic acid. Probably AcOH and pentoses form part of the tea-pectin structure. G. M. Kosolapoff

GOGIYA, V. T.

The biochemical and anatomical changes in tea leaves resulting from scale insect and moth infestation of the plant.
V. S. Dzhush and V. T. Gogiya. Byull. Vsesoyus. Nauk.-Issledovatel. Inst. Chayev Subtrop. Kul'tur. 1953, No. 4, 34-40; Referat. Zhur. Khim. Biol. Khim. 1955, No. 3189.
B. S. Leykin.

GOGLA, A.

And others. Molybdenum, p. 577

TEHNIKA (Savez inzenjera i tehincara Jugoslavije) Beograd, Yugoslavia.
Vol. 14, no. 4, Apr. 1959

Monthly List of East European Accession EEAI LC, Vol. 8, no. 6, June 1959
Uncla.

GOGIADZE, A.S. (L'vov, ul. Serafimovicha, d. 17, kv. 2)

Osgood-Schlatter disease. Vest. rent. i rad. 34 no.1:50-53 Ja-# '59.
(OSTEOCHONDITIS, case reports (MIREA 12:3))
Osgood-Schlatter dis. (Rus))

ACCESSION NR: AP4043774

S/0190/64/006/008/1391/1393

AUTHOR: Goglev, R. S., Neyman, M. B.

TITLE: Thermo-oxidative degradation of polypropylene oxide

SOURCE: Vy'sokomolekulyarnye soyedineniya, v. 6, no. 8, 1964, 1391-1393

TOPIC TAGS: oxidation, oxidative degradation, polymer oxidation, polypropylene, polypropylene oxide, propylene oxide, antioxidant

ABSTRACT: The duration of the induction time (T') of the reaction as a function of temperature, oxygen pressure and the presence of antioxidants was investigated in a study of the oxidative degradation polypropylene oxide, using a method described in an earlier paper. The polymer, with a melting point of 69°C and a molecular weight of 40,000, was prepared by catalytic polymerization of propylene oxide in the presence of ferric chloride and purified by repeated precipitation by water from an acetone solution acidified with hydrochloric acid. The effective activation energy for the oxidation of the polymer, found from a curve of $\lg T'$ vs. $1/T$, is 22 kcal/mol. The induction time was inversely proportional to both temperature and oxygen pressure; yielding hyperbolic curves. Curves showing the retardation of the oxidation by additions of 2, 2-methylene-bis-(4-methyl-6-tert.-butyl

Card 1/3

ACCESSION NR: AP4043774

phenol), N-phenyl-N'-cyclohexyl-p-phenylenediamine, N,N'-dioctyl-p-phenylenediamine and propylgallate are presented in the Enclosure. The 2nd and 4th of these were the most effective. The authors thank S. G. Entelis and K. S. Kazanskiy for providing the polypropyleneoxide." Orig. art. has: 4 figures.

ASSOCIATION:
Physics, AN SSSR)

Institut khimicheskoy fiziki AN SSSR (Institute of Chemical

SUBMITTED: 22Jul63

ENCL: 01

SUB CODE: OC

NO REF SOV: 006

OTHER: 002

Card 2/3

ACCESSION NR: AP4043774

ENCLOSURE: 01

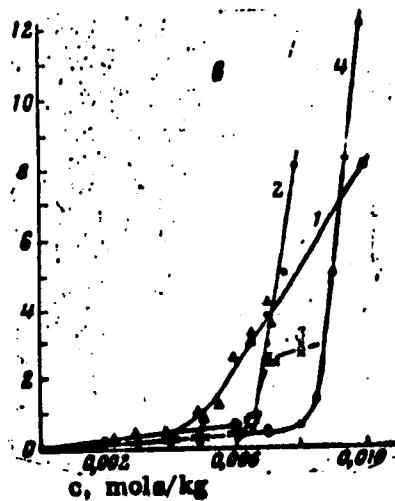
 T , hrs.

Fig. 1. Dependence of the induction period (T) of the oxidation of polypropylene oxide on the concentration of antioxidant (c) at 137°C and $pO_2 = 340$ mm Hg. 1 - 2, 2-methylene-bis-(4-methyl-6-tert.-butylphenol); 2 - N-phenyl-N'-cyclohexyl-p-phenylenediamine; 3 - N,N'-dioctyl-p-phenylenediamine; 4 - propylgallate.

Card 1-3/3

L 34116-65 EPA(s)-2/EWT(m)/EPP(c)/EPR/EWP(j)/T Pcm-4/Pt-6/Ps-4/t-10 MN/1/2/3
ACCESSION NR: AT4049855 S/0000/64/000/000 0156/0159 2/9
2/2 2/3 2/4

AUTHOR: Goglev, R. S.; Neyman, M. B.

TITLE: Thermo-oxidative degradation of polyethylene oxide

SOURCE: Khimicheskiye svoystva i modifikatsiya polimerov (Chemical properties and the modification of polymers); sbornik statay. Moscow, Izd-vo Nauka, 1964, 156-159

TOPIC TAGS: polyethylene oxide, thermal degradation, propylgallate, aromatic amine, oxidative degradation, polymer oxidation, antioxidant

ABSTRACT: The induction period of the oxidation of polyethylene oxide (PEO) was investigated as a function of temperature and oxygen pressure. The initial product (molecular weight 25000) was obtained by bulk polymerization of ethylene oxide over strontium carbonate at 100°C and purified by precipitation from a benzene solution with normal heptane. Experiments on PEO oxidation at different temperatures showed that after a more or less prolonged induction period, there was rapid oxygen absorption. The induction period decreased with increasing temperature and oxygen pressure, up to 250 mm Hg. The activation energy of oxidation

Card 1/3

L 34116-65
ACCESSION NR; AT4049855

was calculated at 33,000 cal/mole. The data obtained for the retardation of oxidation of PEO by antioxidants are tabulated. The induction period at a concentration of antioxidant of 9.5×10^{-3} mole/kg, 135°C and $P_{O_2} = 340$ mm was chosen as characteristic for evaluating the effectiveness of stabilizers.¹² The plotted and tabulated data show that at the given temperature and oxygen pressure, oxide radicals are less effective in the inhibition of polymer oxidation than propylgallate, 2,2-methylene-bis(4-methyl-6-tert.-butylphenol) and aromatic amines. The retardation of PEO oxidation by antioxidants depends considerably on both temperature and antioxidant concentration. Thus, for 2,2-methylene-bis-(4-methyl-6-tert.-butylphenol) at $P_{O_2} = 340$ mm, the induction period was 3.5 hrs. at a concentration of 9×10^{-3} mole/kg, 2 hrs. at 8×10^{-3} mole/kg, and 1.7 hrs. at 7×10^{-3} mole/kg at 145°C. The induction period of PEO oxidation in the presence of 2,2,5,5-tetramethyl-3-piperidine oxide also varied with the initial oxygen pressure. "The authors express their gratitude to S. G. Entelis and K. S. Kazanskiy for supplying the polyethylene oxide, and to Yu. G. Mamedov and L. A. Kalashnikov for the samples of stable radicals." Orig. art. has 1 table and 2 figures.

ASSOCIATION: Institut khimicheskoy fiziki AN SSSR (Chemical physics Institute,
AN SSSR)

Card 2/3

"APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R000615530004-7

L 34116-65

ACCESSION NR: AT4049855

SUBMITTED: 15Oct52

NO REP SOV: 010

ENCL: 00 SUB ODDN: 00

OTHER: 003

Card 3/3

APPROVED FOR RELEASE: 09/19/2001

CIA-RDP86-00513R000615530004-7"

GOGLEV, S.I.

An industrial and cultural center in the North; economic and
geographical features of the city of Vologda. Volog. krai no.2:
63-117 '60. (MIRA 14:11)

1. Predsedatel' ispolkoma Vologodskogo gorodskogo Soveta deputatov
trudyashchikhsya.
(Vologda--Economic geography)